



## Heatingcable NUCS10W/m



With the lightweight and 4mm NUCS heating cables, you can rest assured that our products are eco-friendly and easy to install.

The 4 mm cable is developed for modern, low-build floors. We recommend our NTB-2R thermostat for user friendly operation either stand alone or together with Nobø Energy Control system.

NUCS heating cables carry a 15-year warranty.


We recommend the following effects for Nobø NUCS heating cable: - Bedroom: 60-80W/m<sup>2</sup> - Livingroom: 80-100W/m<sup>2</sup> - Bathroom: 130-150W/m<sup>2</sup>

Nobø NUCS heatingcable is attached to a cable reel that makes it easy to install and shape for any concrete floor installation. The series resistive heating cable has a PVC sheath and a generous 3m cold connection end for simple and flexible connection to any thermostat.

Cables are recommended for floor heating in standard concrete floors and low-build floors. The heating cable can be attached to a reinforced net or glued directly on a non-flammable surface. Always use proper insulation before installing the heating cable for the most energy-efficient heating system. Under-floor heating products must be installed by an approved installer.




# Heatingcable NUCS10W/m

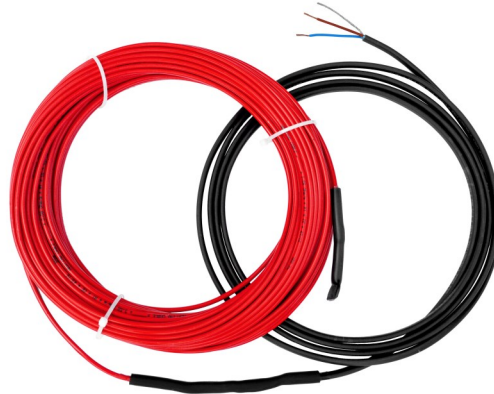

Malli	Sähkönumero	Teho (w)	EAN	Vastus ( $\Omega$ )	Paino (kg)	Pituus (m)
NUCS10W-65W-8m	8130000	65	8590875063030	803-818	0,7	6,6
NUCS10W-120W-11m	8130001	120	8590875063047	419,3-485,5	1,2	11,4
NUCS10W-200W-19m	8130002	200	8590875063054	251,8-291,5	1,25	18,9
NUCS10W-250W-24m	8130003	250	8590875063061	200,9-232,6	1,45	23,6
NUCS10W-320W-32m	8130004	320	8590875063078	157-181,9	1,7	31,6
NUCS10W-400W-37m	8130005	400	8590875063085	125,6-145,5	1,9	36,9
NUCS10W-450W-46m	8130006	450	8590875063092	112-129,7	2,25	45,9
NUCS10W-520W-50m	8130007	520	8590875063108	96,6-111,8	2,45	49,6
NUCS10W-600W-64m	8130008	600	8590875063115	83,9-97,1	2,95	63,9
NUCS10W-750W-76m	8130009	750	8590875063122	66,7-77,2	3,05	75,8
NUCS10W-950W-87m	8130010	950	8590875063139	52,7-61,1	3,5	87
NUCS10W-1100W-114m	8130011	1100	8590875063146	46,1-53,4	4,65	114,5
NUCS10W-1300W-131m	8130012	1300	8590875063153	39,7-44,8	5,1	131,3
NUCS10W-1700W-159m	8130013	1700	8590875063160	29,5-34,2	6,55	158,5
NUCS10W-2000W-195m	8130014	2000	8590875063177	25,2-29,1	8,05	194,5

## Technical data: Nobø NUCS10W/m Heatingcable

Cable Construction	Doble cord solid resistance wires	
Insulation	Flourpolymer 0,3mm thickness	
Protectionscreen	7 tinned copperwires $\varnothing$ 0,3mm + AIPET foil	
Jacket	PVC therm resistant (105°C) - 0,8mm thickness	
Cable diameter	4mm - 3m long black cold end	
Permanent heating endurance:	-30 +80 (Temp. during installation -5°C)	
Max powerload	10W/m	
Operating voltage	230V	
Covering	IP67	
Class of mechanical endurance:	M1 Classification	
Minimum radius	30mm	
Self extinguishing	Yes	
Jacket colour	Red	

## Underfloor Heating Thermostat NTB-2R



Malli	Valm. tuoten:o	Sähkönumero	GTIN	Mitat ilman pakkausta (mm)	Pakkauksen mitat (mm)	Paino, sis pakk.
Nobø NTB 2R	86000101	5422485	7030690104224	86x86x43	90x90x55	200g